



CL2-D4 Chlorine SensorMiniature Size



Figure 1 CL2-D4 Schematic Diagram

PATENTED

-20 to 50


80 to 120

15 to 90

6

33

< 2

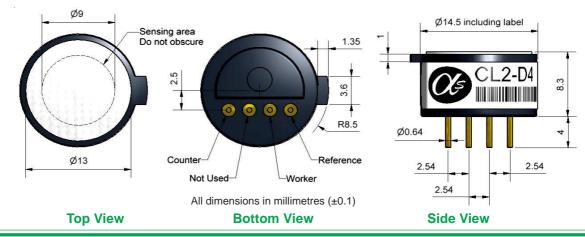

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas limit	nA/ppm in 10ppm Cl ₂ t ₉₀ (s) from zero to 10ppm Cl ₂ ppm equivalent in zero air RMS noise (ppm equivalent) ppm Cl ₂ limit of performance warranty ppm error at full scale, linear at zero and 10ppm Cl ₂ maximum ppm for stable response to gas pulse	-150 to -350 < 35 ± 0.8 < 0.1 20 ± 0.5 60
LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air % change/month in lab air, twice monthly test months until 80% original signal (24 month warrante	nd nd ed) > 18
ENVIRONMENTAL	Sensitivity @ -20°C Sensitivity @ 50°C Zero @ -20°C Zero @ 50°C	% (output @ -20°C/output @ 20°C) @ 10ppm Cl ₂ % (output @ 50°C/output @ 20°C) @ 10ppm Cl ₂ ppm equivalent change from 20°C ppm equivalent change from 20°C	80 to 110 95 to 125 -0.4 to 0.4 0 to 0.5
CROSS SENSITIVITY	$\stackrel{\text{NO}_2}{\text{NO}_2}$ sensitivity % m $\stackrel{\text{NO}_2}{\text{SO}_2}$ sensitivity % m $\stackrel{\text{CO}}{\text{Sensitivity}}$ % m $\stackrel{\text{CO}}{\text{Sensitivity}}$ % m $\stackrel{\text{CO}}{\text{C}_2H_4}$ sensitivity % m	neasured gas @ 20ppm H ₂ S neasured gas @ 10ppm NO ₂ neasured gas @ 50ppm NO neasured gas @ 20ppm SO ₂ neasured gas @ 400ppm CO neasured gas @ 400ppm H ₂ neasured gas @ 400ppm C ₂ H ₄ neasured gas @ 20ppm NH ₃	< -200 < 120 < 0.5 < -3 < 0.1 < 0.1 < 0.1

Note: Above 85% rh and 40°C a maximum continuous exposure period of 10 days is warranted. Where such exposure occurs the sensor will recover

%rh (see note below)

Temperature range ^OC

normal electrolyte volumes when allowed to rest at lower % rh and temperature levels for several days.

Humidity range

Storage period

Load resistor

Weight

kPa

SPECIFICATIONSPressure range



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

 Ω (for optimum performance)

months @ 3 to 20^OC (stored in sealed pot)

NOTE: all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements





CL2-D4 Performance Data

Figure 2 Response to 10ppm Cl,

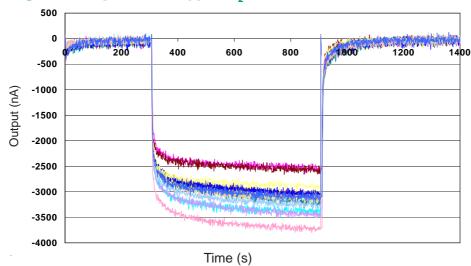


Figure 2 shows response to 10ppm Cl_a.

1400 This data is taken from a typical batch of sensors.

Figure 3 Zero Temperature Dependence

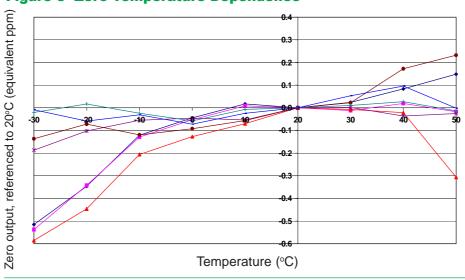


Figure 3 shows the variation in the zero by changes in temperature, expressed as equivalent ppm, referenced to zero at 20°C This data is taken from a typical batch of sensors.

Figure 4 Load Resistor Dependence

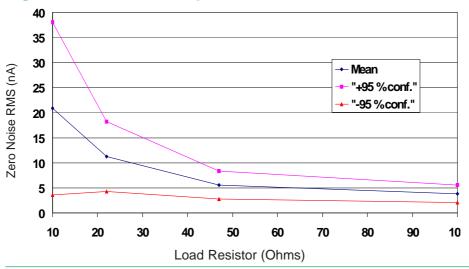


Figure 4 shows the effect of the load resistor on noise. Higher resistance reduces sensor noise, but also linearly increases response time.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. or visit our web site at "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (©ALPHASENSE LTD) Doc. Ref. CL2D4/DEC20